

40MnB5

Boron alloyed quenched and tempered steel



访问我们的官方网站了解更多内容

扫描二维码关注

Material no	-
Material informationsblatt	
according to	DIN EN ISO 683-2
Tensile strength class	C

General information

Steel grade 40MnB5 in accordance with DIN EN ISO 683-2 is one of the boron-alloyed quenched and tempered steels. These grades are characterized in particular by their formability in the hot rolled state and their high strength after the heat treatment. The strength characteristics after quenching and tempering are achieved in particular by the low boron content, in addition to the carbon and manganese. SZFG is current delivering manganese-boron steels from 10MnB5 to 40MnB5.

Chemical composition ¹⁾²⁾

(in percent by weight)

	min. in %	max. in %
C	0.36	0.43
Si	0.15	0.35
Mn	1.05	1.45
P		0.02
S		0.006
Cr	0.35	0.60
Ti	0.020	0.055
B	0.0008	0.0050

1) Heat analysis

2) Deviating promises may be possible by arrangement.

Typical mechanical properties³⁾

Yield strength $R_{p0.2}$ in MPa (thickness $e \leq 6$ / $e > 6$)
390 - 800 / 380 - 700

Tensile strength R_m in MPa (thickness $e \leq 6$ / $e > 6$)
600 - 950 / 600 - 900

Total elongation $A_{80}^{(4)}$ in %
 ≥ 7

Total elongation $A_5^{(4)}$ in % (thickness $e \leq 6$ / $e > 6$)
 ≥ 11 / ≥ 9

3) Tested transverse to direction of rolling.

4) It applies to nominal thickness e :

$e < 3$ mm: A_{80}

$e \geq 3$ mm: A_5

Available dimensions

Hot-rolled coils unpickled, mill edge

Thickness in mm	Width in mm
2.00 - 2.24	900 - 1,300
2.25 - 2.99	900 - 1,350
3.00 - 3.99	900 - 1,550
4.00 - 6.99	900 - 1,750
7.00 - 7.99	900 - 1,800
8.00 - 12.70	900 - 1,900

Widths up to 2,000 mm on request.

Hot-rolled slit strip

Thickness in mm	Width in mm
2.00 - 2.99	100 - 640
3.00 - 4.60	100 - 690
4.61 - 6.00	140 - 740

Delivery form

The steel is supplied as hot-rolled strip (pickled, unpickled) as well as longitudinally or transversely cut hot-rolled strip in nominal thicknesses from 2.0 to 12.7 mm in

widths in accordance with the SZFG delivery programme (strength class C). Additional thicknesses are also available upon agreement. SZFG uses a Ti-Cr concept. Where necessary, a statement of the required chemical analysis or inclusion of a customer specification is required.

The conditions of DIN EN ISO 683-2, Sections 6.3 and 8 apply to the delivery and inspection. All quenched and tempered steels are delivered in a hot-rolled, untreated state.


Inspection certificates in accordance with DIN EN 10204 can also be delivered in the following forms: computer medium, remote data transmission, fax, E-Mail, paper.

Microstructure

In the hot-rolled state, the 40MnB5 typically exhibits a ferritic-pearlitic microstructure with a typical grain size of > 9 according to ASTM.



200:1

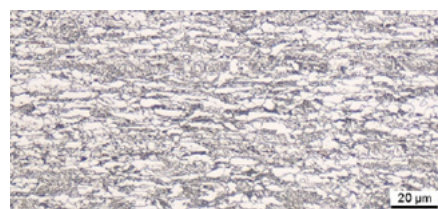

500:1



访问我们的官方网站了解更多内容

扫描二维码关注


In the hardened and tempered state, after suitable heat treatment the manganese-boron steels form a microstructure consisting of 100% martensite:



Hardened state, water cooled 200:1



Tempered state, water cooled 200:1

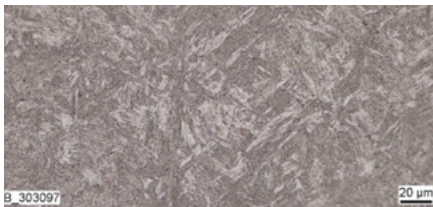


Tempered state, oil cooled 200:1

Example applications

Thanks to the combination of ductility and hardness, the 40MnB5 is particularly used for agricultural products.



Example:
harvester blades



Example: chopper blades



Welding

The manganese-boron steels are suitable for welding with all known welding procedures, either by hand or with automatic systems. Resistance spot welding, gas-shielded welding and laser beam welding are particularly applicable. The steels are also suitable for welding in mixed joints with other common steel grades and in different thicknesses. The quality of the welded joint, however, depends on the welding procedure, the welding conditions and the selection of the correct filler materials.

In addition, it must be noted that when welding these steels in the quenched and tempered state, tempering effects can occur in the joining zone. This can reduce the strength of the joint compared to the base material that was strongly solidified by the preceding hot-forming process.



微信公众号



常州仁成金属制品有限公司

15年专注 **无缝钢管** 定制生产

用心打造每一根钢管，做无缝钢管定制技术的赢领者
研发技术团队11人，为您的个性化需求提供整体解决方案

常州精密钢管博客网



官网: www.rcmetal.cn

官博: www.josen.net